



1. Unlock case with keys provided and remove faceplate.




2. Feed cable through the stand and plug in your tablet while placing it into the case.



3. Place faceplate back on and lock. *Follow steps 4-6 for adhesive mount instructions*




4. Wipe base of stand and your mounting surface with alcohol wipes provided and let dry.

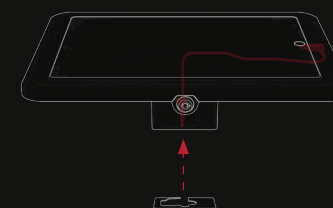

5. Stick 3M adhesive to the base of stand and firmly place down on your mounting surface.



6. Let the stand sit for 24 hours before use.

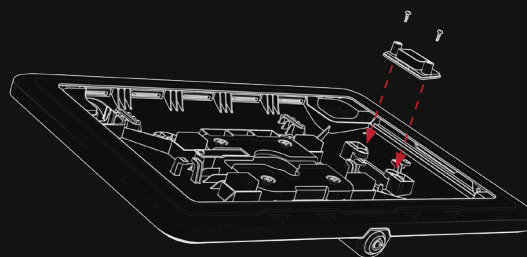


Optional Cable Cutout

Unscrew existing closed cable cutout and install the open cable cutout included with stand.




Optional Position Lock

Rotate stand 45 degrees so cable hole is on the left, then screw in lock screw as shown. This will lock the rotation for a fixed option.

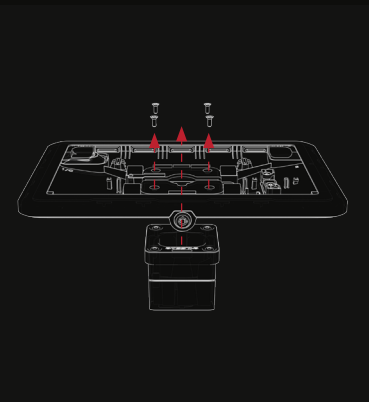

1. Remove screws from case and lift the case off the stand.

TOP VIEW

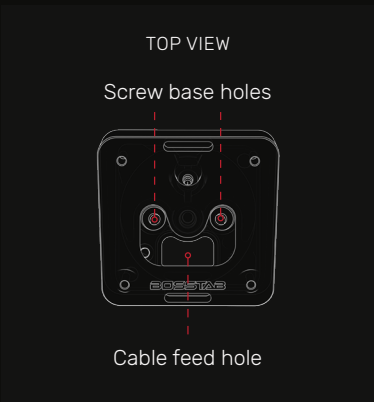

Screw base holes

Cable feed hole


2. Follow the above locations to line up your surface mounting and cable feed.




3. Drill pilot holes to assist with screw base mounting. Refer to the mounting guide for assistance.




4. If you are running your charging cable through the surface, ensure to drill a larger hole to feed cable through.

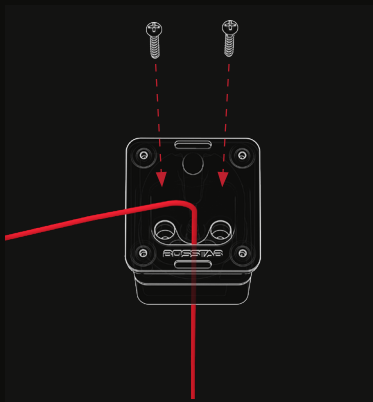


5. With the cable channel facing out the left hand side of the stand, screw down your stand using the wood screws provided.

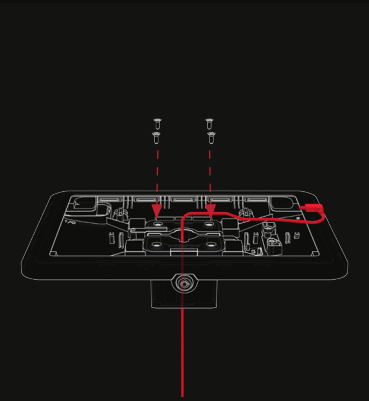


6. Place case back on the stand and screw back in the 4 screws.

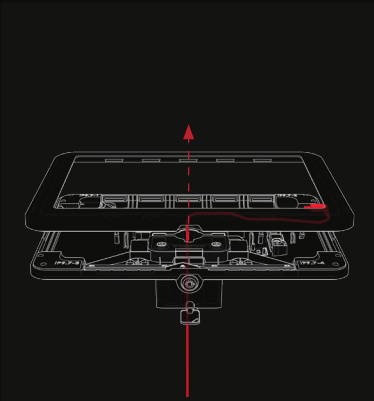

7. Unlock case with keys provided and remove faceplate.

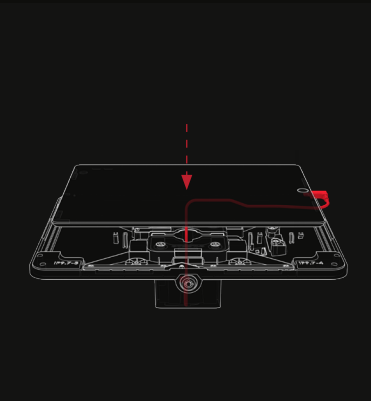

8. Plug in your tablet while placing it into the case.

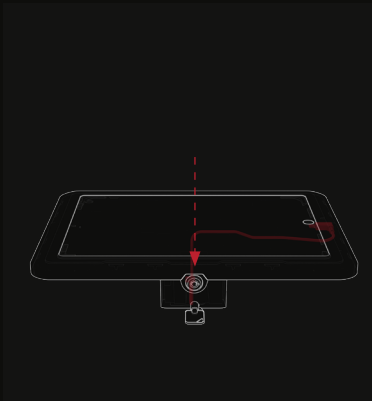

9. Place faceplate back on and lock.

For more information or to contact our sales & customer support team please click on the links below:

Contact Us

Warranty & Returns

Shipping